
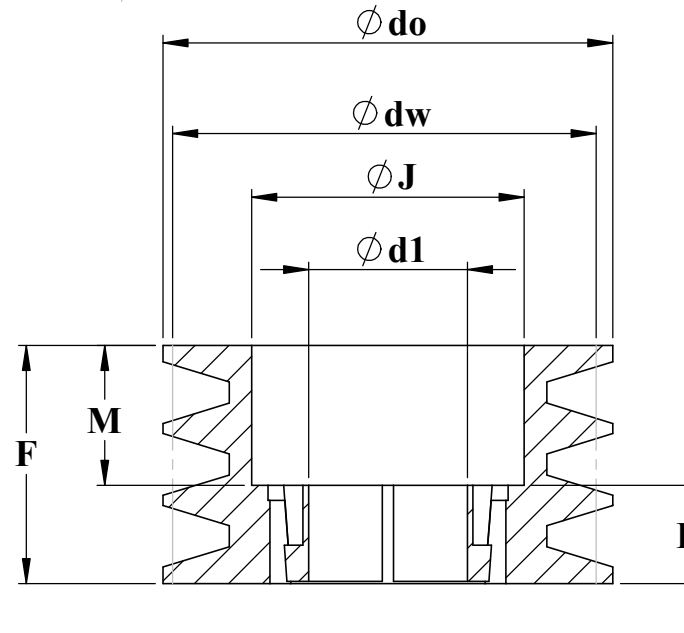


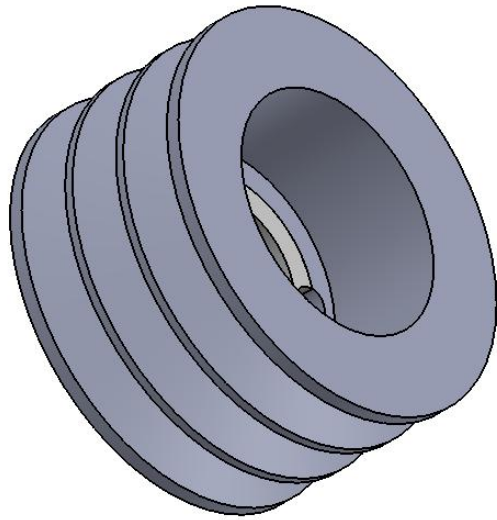

| dw  | N<br>(grooves) | Fig.<br>(Pulley Type) | TB   | d <sub>1</sub> |     | F  | J   | K | L  | M  | N | do  | Whight<br>[Kg] |
|-----|----------------|-----------------------|------|----------------|-----|----|-----|---|----|----|---|-----|----------------|
|     |                |                       |      | Min            | Max |    |     |   |    |    |   |     |                |
| 160 | 3              | 2                     | 2517 | 18             | 60  | 63 | 117 | - | 45 | 18 | - | 167 | 4.5            |

**Note:**  
 -Dynaminc Balancing at: 1500 rpm acc. to ISO 1940/1 Gr "6.3".  
 -V Pulley Phosphate Coated.  
 -All Dimension acc. to DIN 2211.

|                                                                                                  |                                       |                                                                                                        |                            |
|--------------------------------------------------------------------------------------------------|---------------------------------------|--------------------------------------------------------------------------------------------------------|----------------------------|
| <br>ISO 128 | Material:<br><b>Ductile Cast Iron</b> | <b>Rata Eng.</b>  |                            |
| Title:<br><b>160 SPB-3</b>                                                                       |                                       |                                                                                                        |                            |
| Size: A4                                                                                         | Revision:                             | Scale                                                                                                  | Sheet <b>1</b> OF <b>1</b> |
| Tel: +98 31 33 93 2334                                                                           |                                       | URL: <a href="http://www.rata-tech.com">www.rata-tech.com</a>                                          |                            |
| Fax: +98 31 33 93 2335                                                                           |                                       | Email: <a href="mailto:info@rata-tech.com">info@rata-tech.com</a>                                      |                            |