



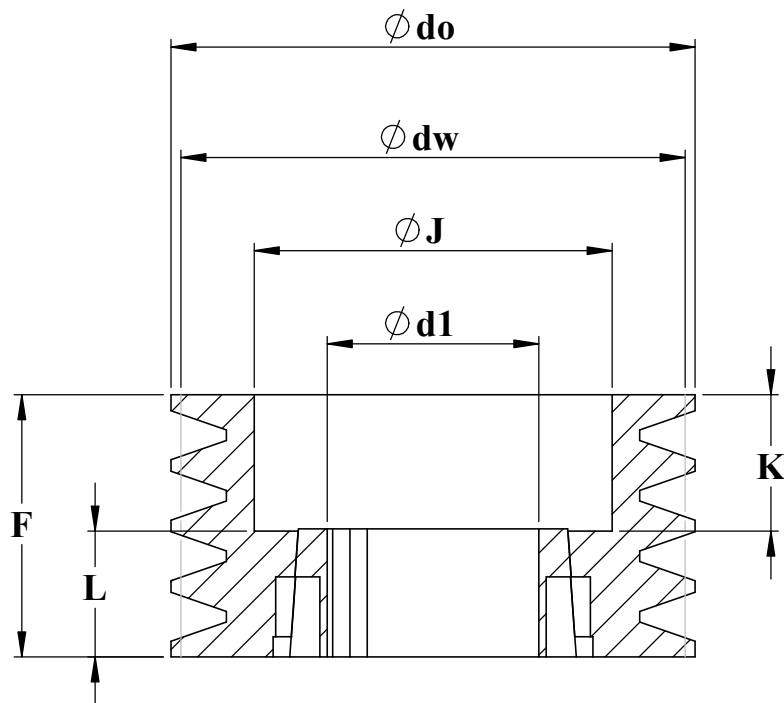

| dw | N<br>(grooves) | Fig.<br>(Pulley Type) | TB   | d <sub>1</sub> |     | F  | J  | K  | L  | M | N | do | Whight<br>[Kg] |
|----|----------------|-----------------------|------|----------------|-----|----|----|----|----|---|---|----|----------------|
|    |                |                       |      | Min            | Max |    |    |    |    |   |   |    |                |
| 95 | 4              | 6                     | 1610 | 12             | 42  | 52 | 66 | 27 | 25 | - | - | 99 | 1.3            |

**Note:**  
 -Dynaminc Balancing at: 1500 rpm acc. to ISO 1940/1 Gr "6.3".  
 -V Pulley Phosphate Coated.  
 -All Dimension acc. to DIN 2211.

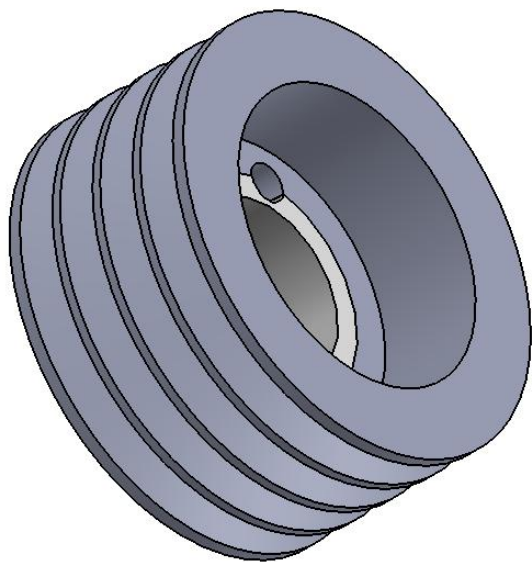

ISO 128

Material:  
Ductile Cast Iron

Rata Eng. 

Title:

**95 SPZ-4**

Size: A4

Revision:

Scale

Sheet **1** OF **1**

Tel: +98 31 33 93 2334  
 Fax: +98 31 33 93 2335

URL: [www.rata-tech.com](http://www.rata-tech.com)  
 Email: [info@rata-tech.com](mailto:info@rata-tech.com)